



DATE	SYM.	DESCRIPTION	DR	CK	REL

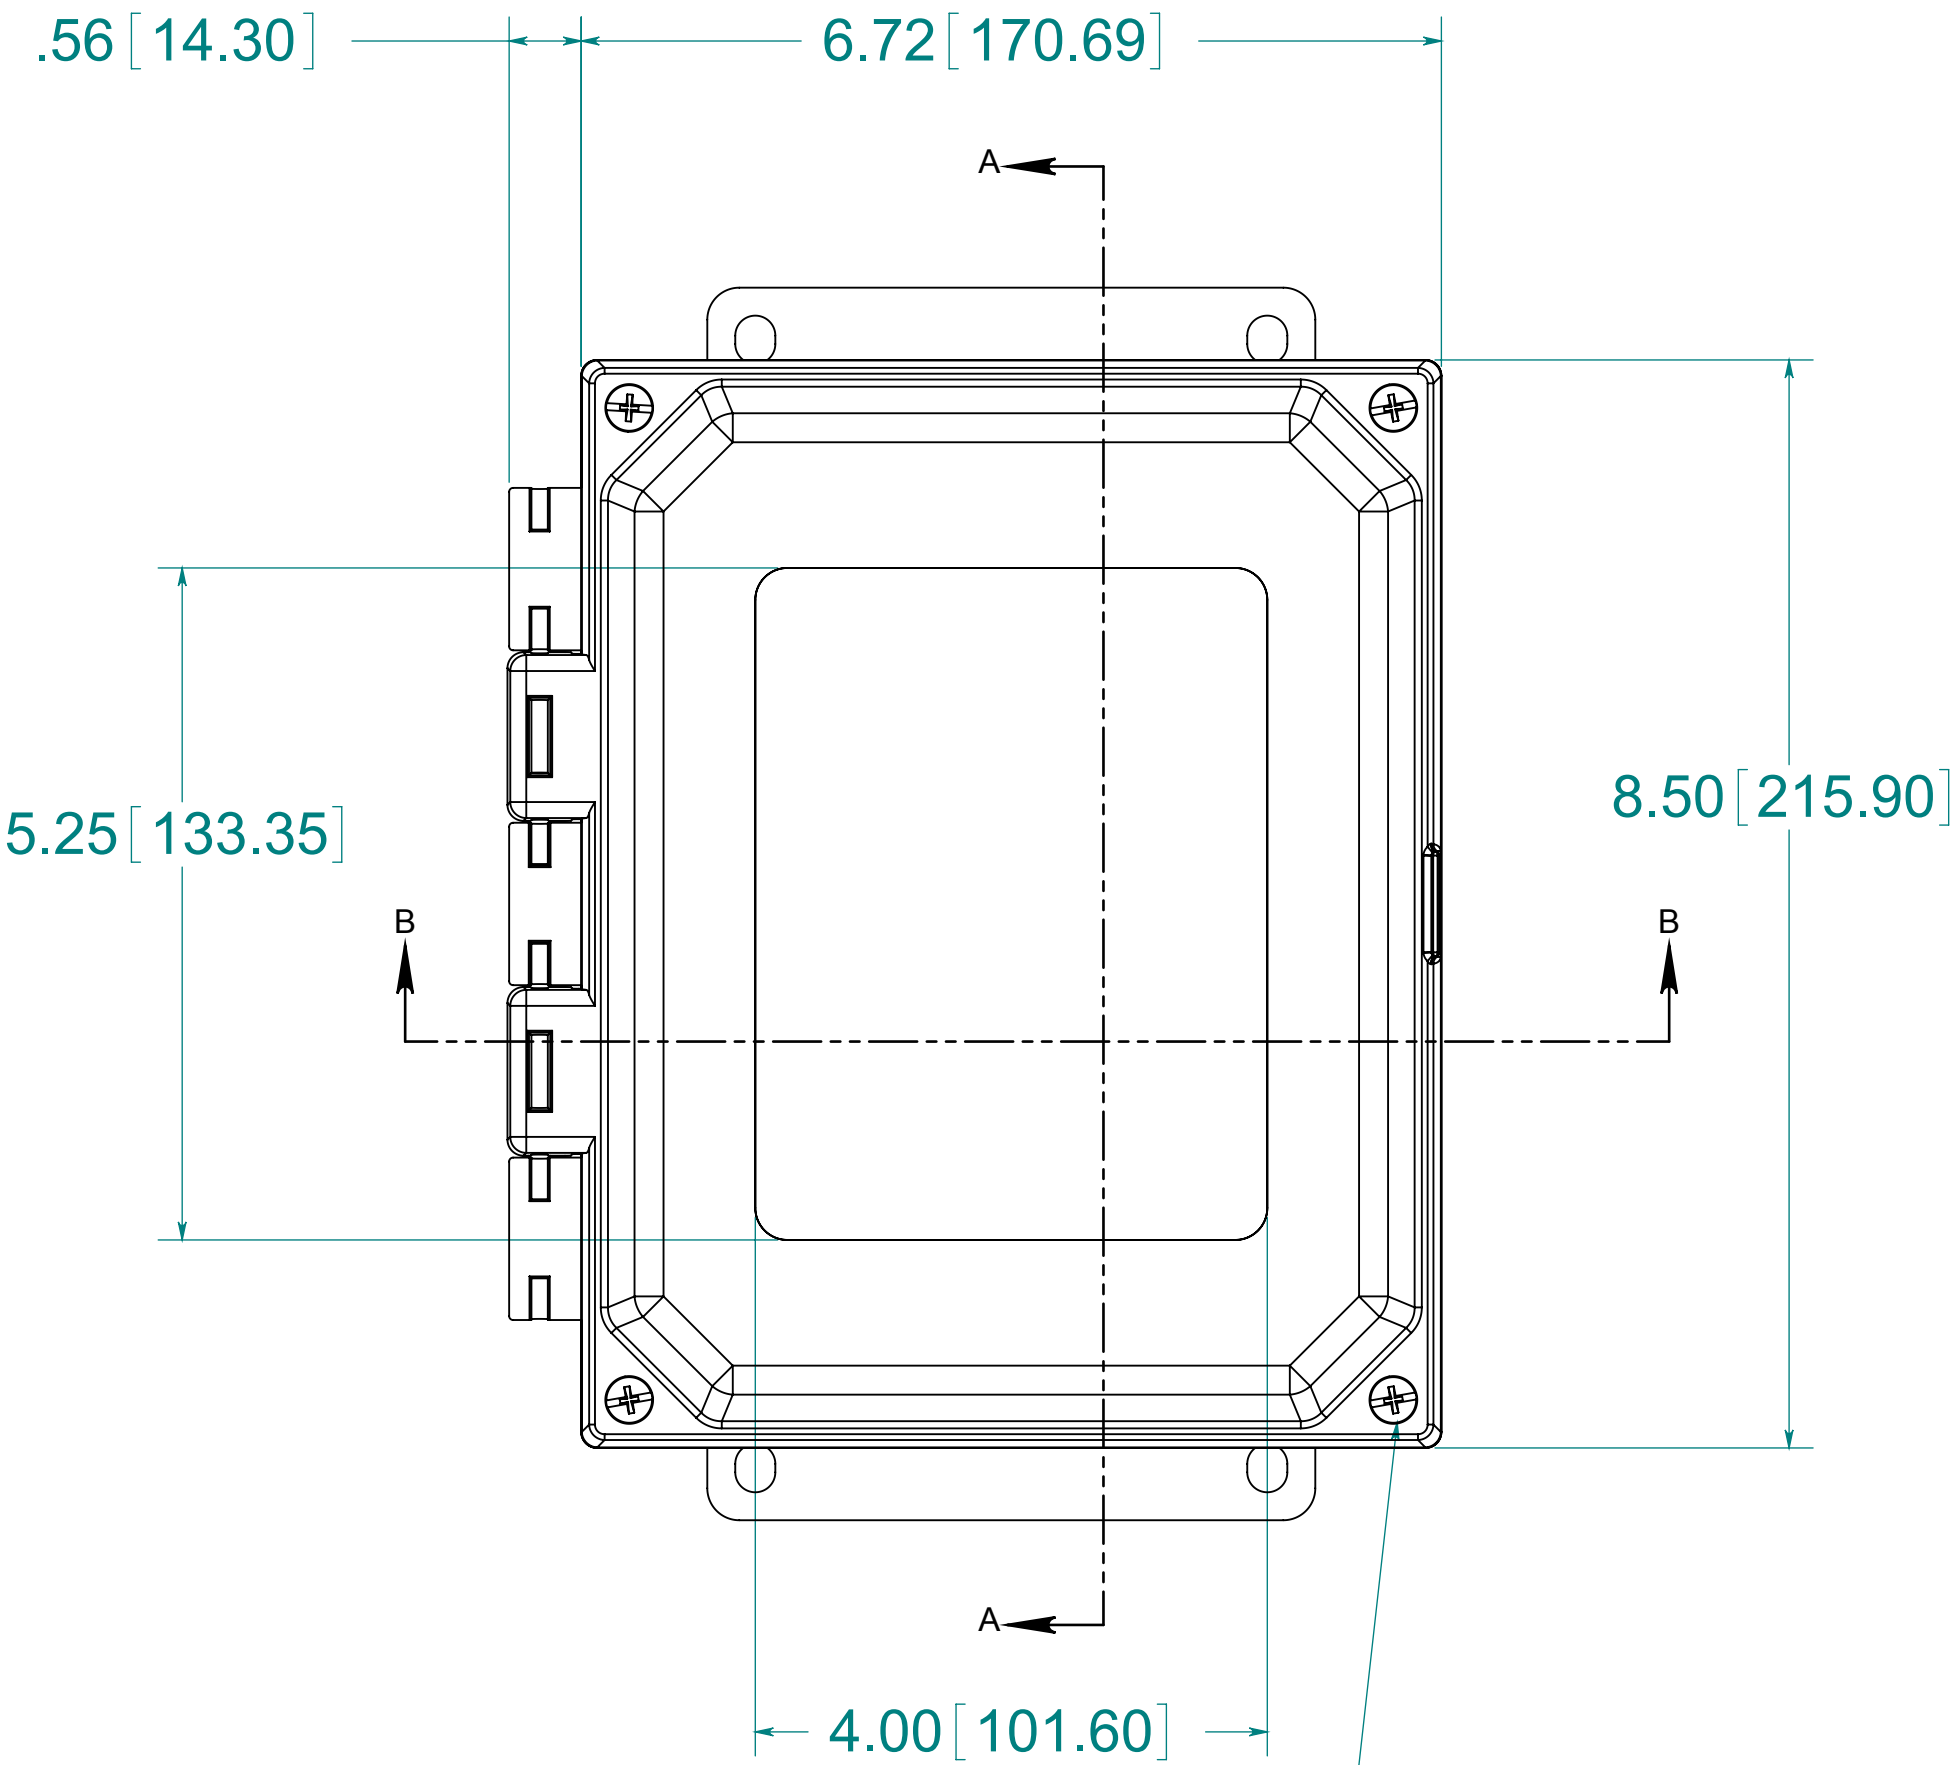

(4) EACH #10-32 BRASS INSERTS AND STAINLESS STEEL CAPTIVE COVER SCREWS

CLOSED CELL NEOPRENE GASKET

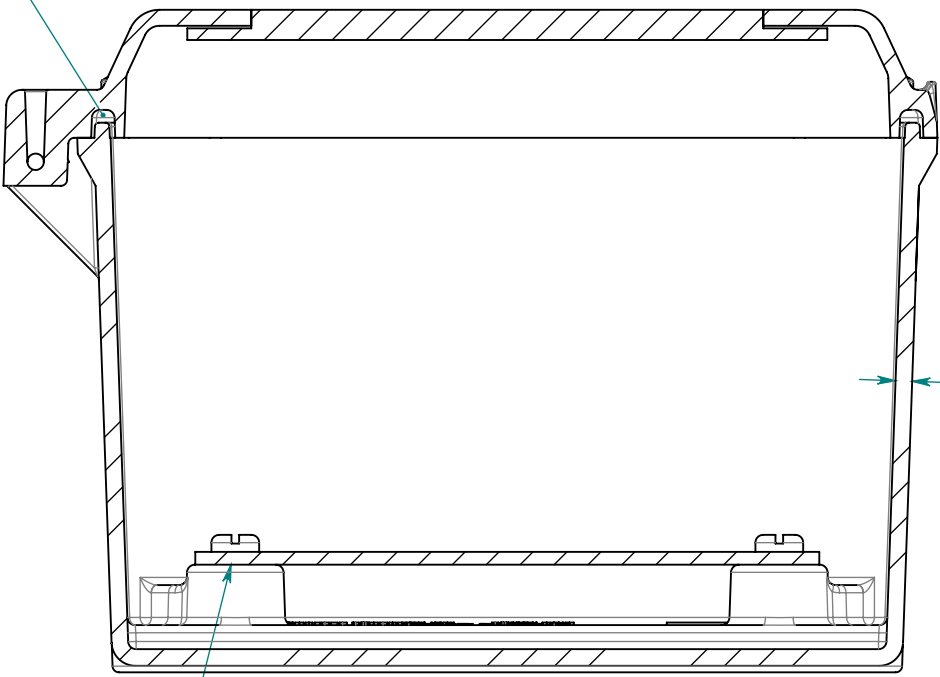


SECTION B-B

(4) EACH #10-32 BRASS INSERTS AND PLATED CARBON STEEL SCREWS

MATERIAL:


BOX- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
COVER-COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
CLEAR COVER AND WINDOWS- POLYCARBONATE

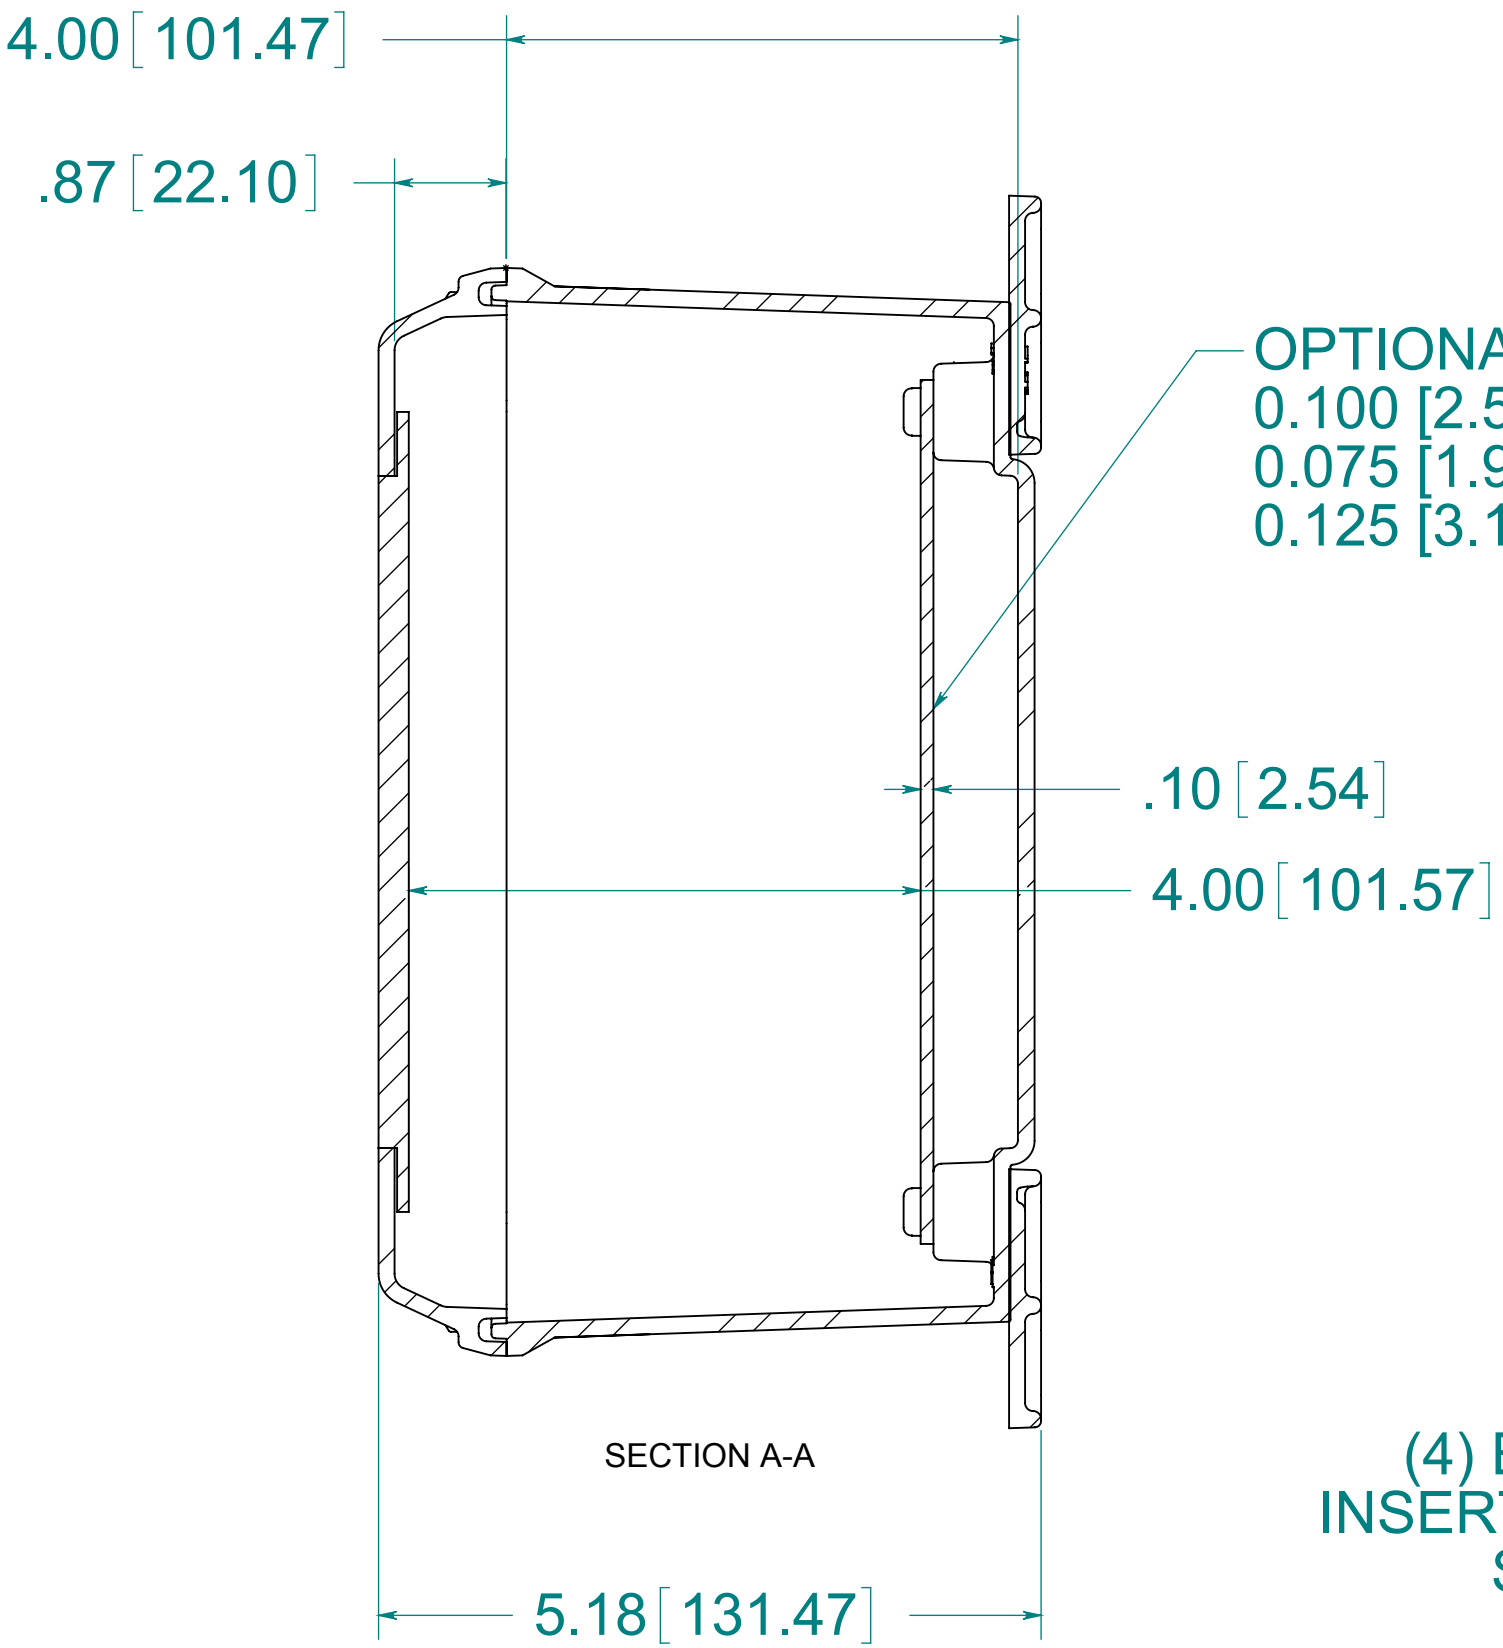


OPTIONAL BACK PANEL
0.100 [2.54] TH'K- ALUMINUM
0.075 [1.91] TH'K- WHITE STEEL & GALVANNEALED
0.125 [3.18] TH'K- FIBERGLASS

(4) EACH #10-32 BRASS INSERTS, AND STAINLESS STEEL FLANGE AND FEET SCREWS

FRONT VIEW
WITH COVER REMOVED
AND BACK PANEL DISPLAYED

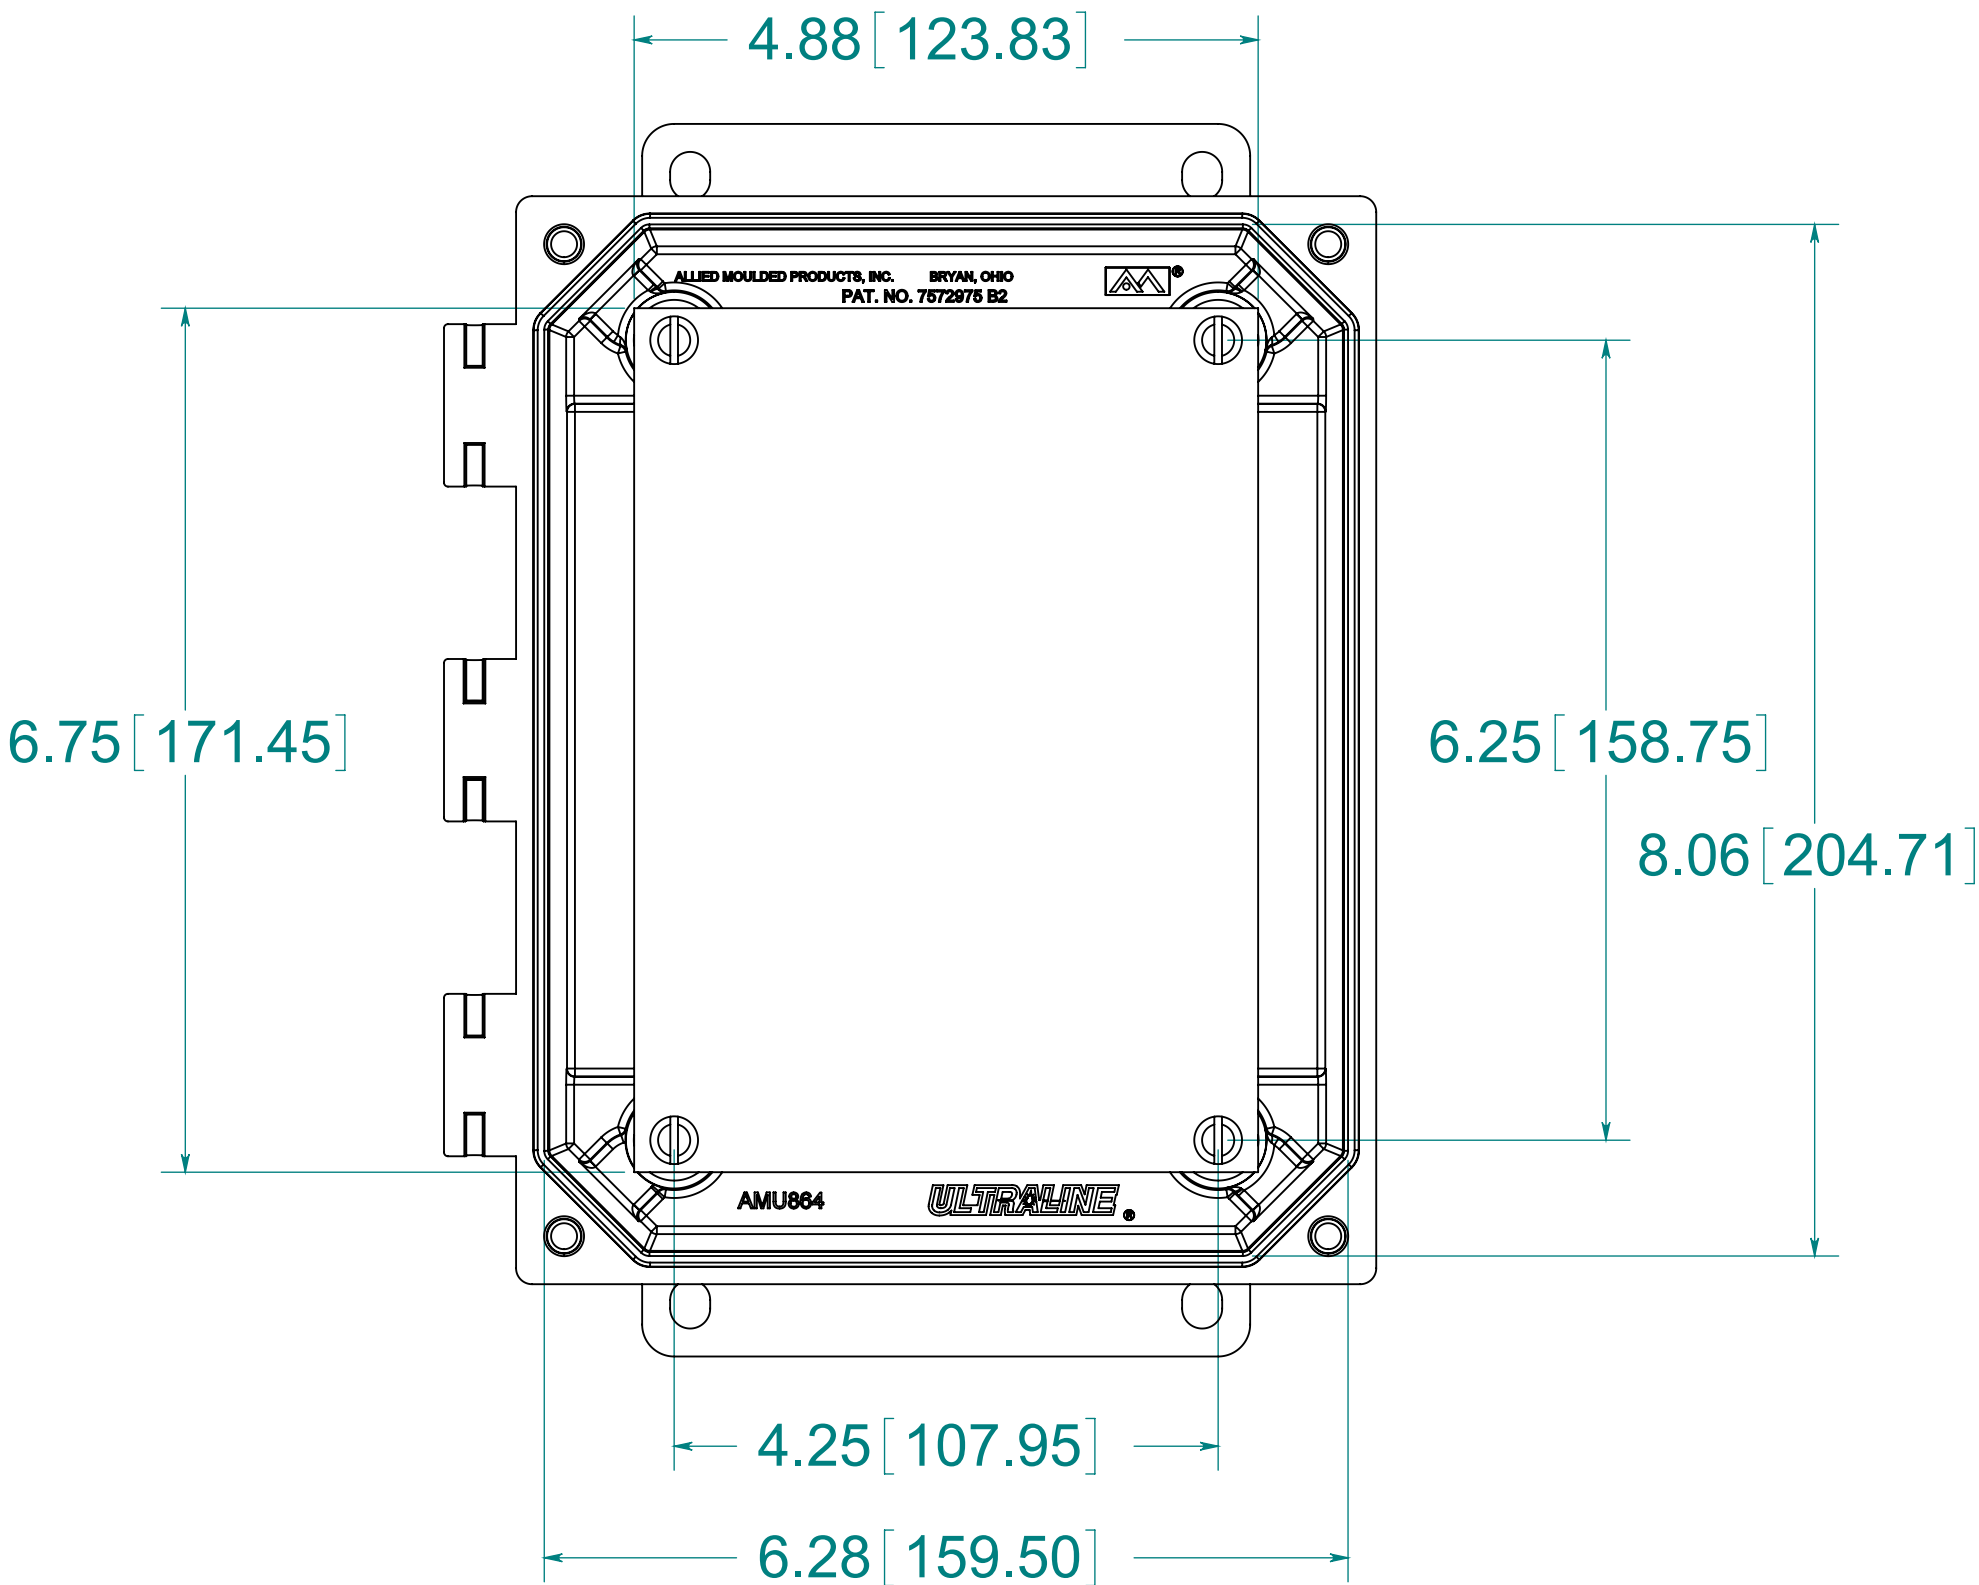

BACK VIEW

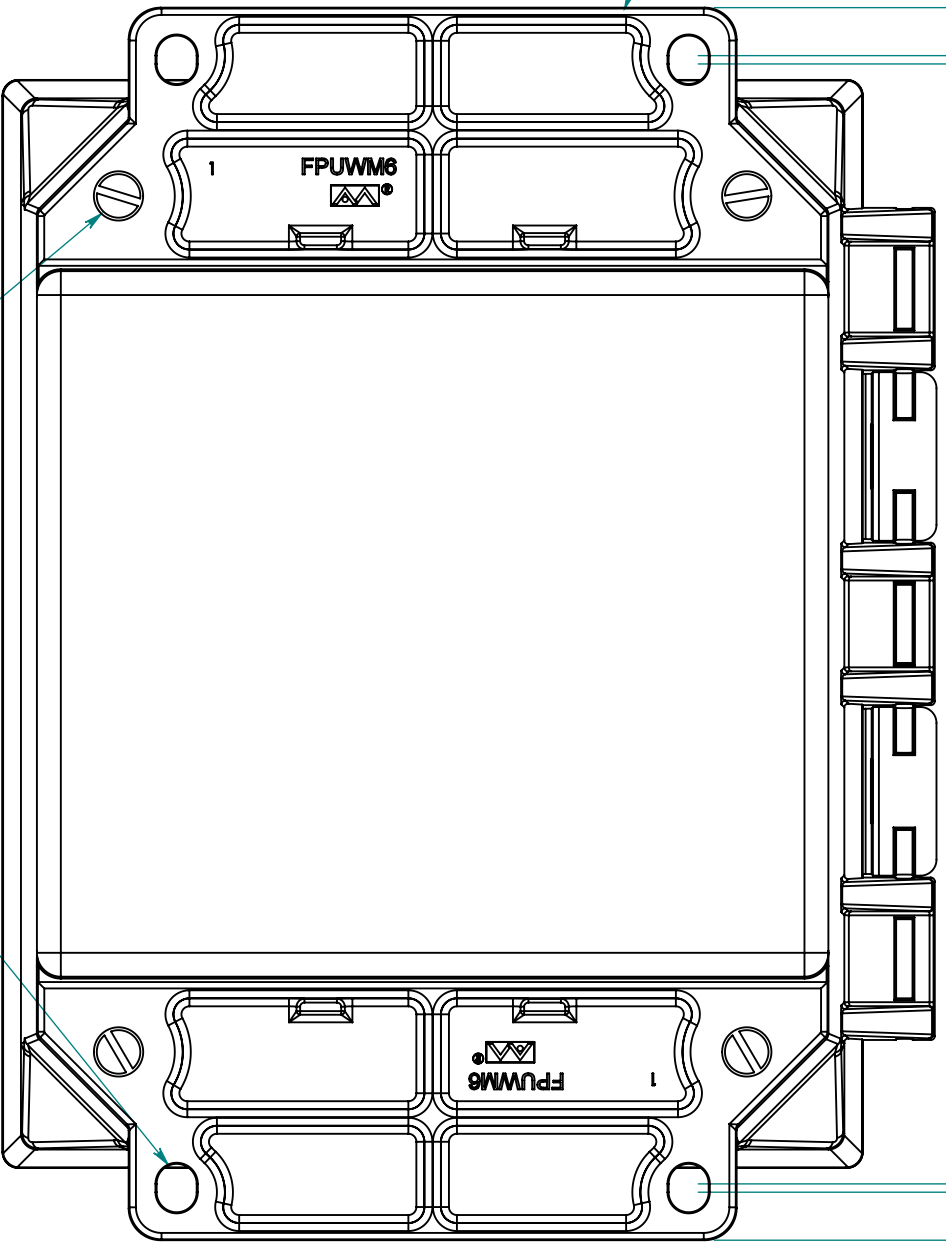


(2) POLYCARBONATE FLANGES (GLUED)

8.75 [222.24]
MIN
SLOT
DIST

9.63 [244.59]

8.88 [225.54]
MAX
SLOT
DIST.

(8)x R.155 [R3.94]

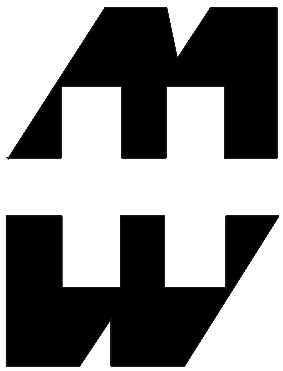

PART No. PJU864WF
for more information visit
www.hammfg.com
Data subject to change without notice
Drawing Not to Scale