NOTES

MATERIAL – DIECAST ALUMINUM ALLOY
– FOUR M12 CAPTIVE SCREWS

POWDER COATED – Col. RAL 7032
GASKET – POLYURATHANE
–40°C TO +80°C TEMP. RANGE

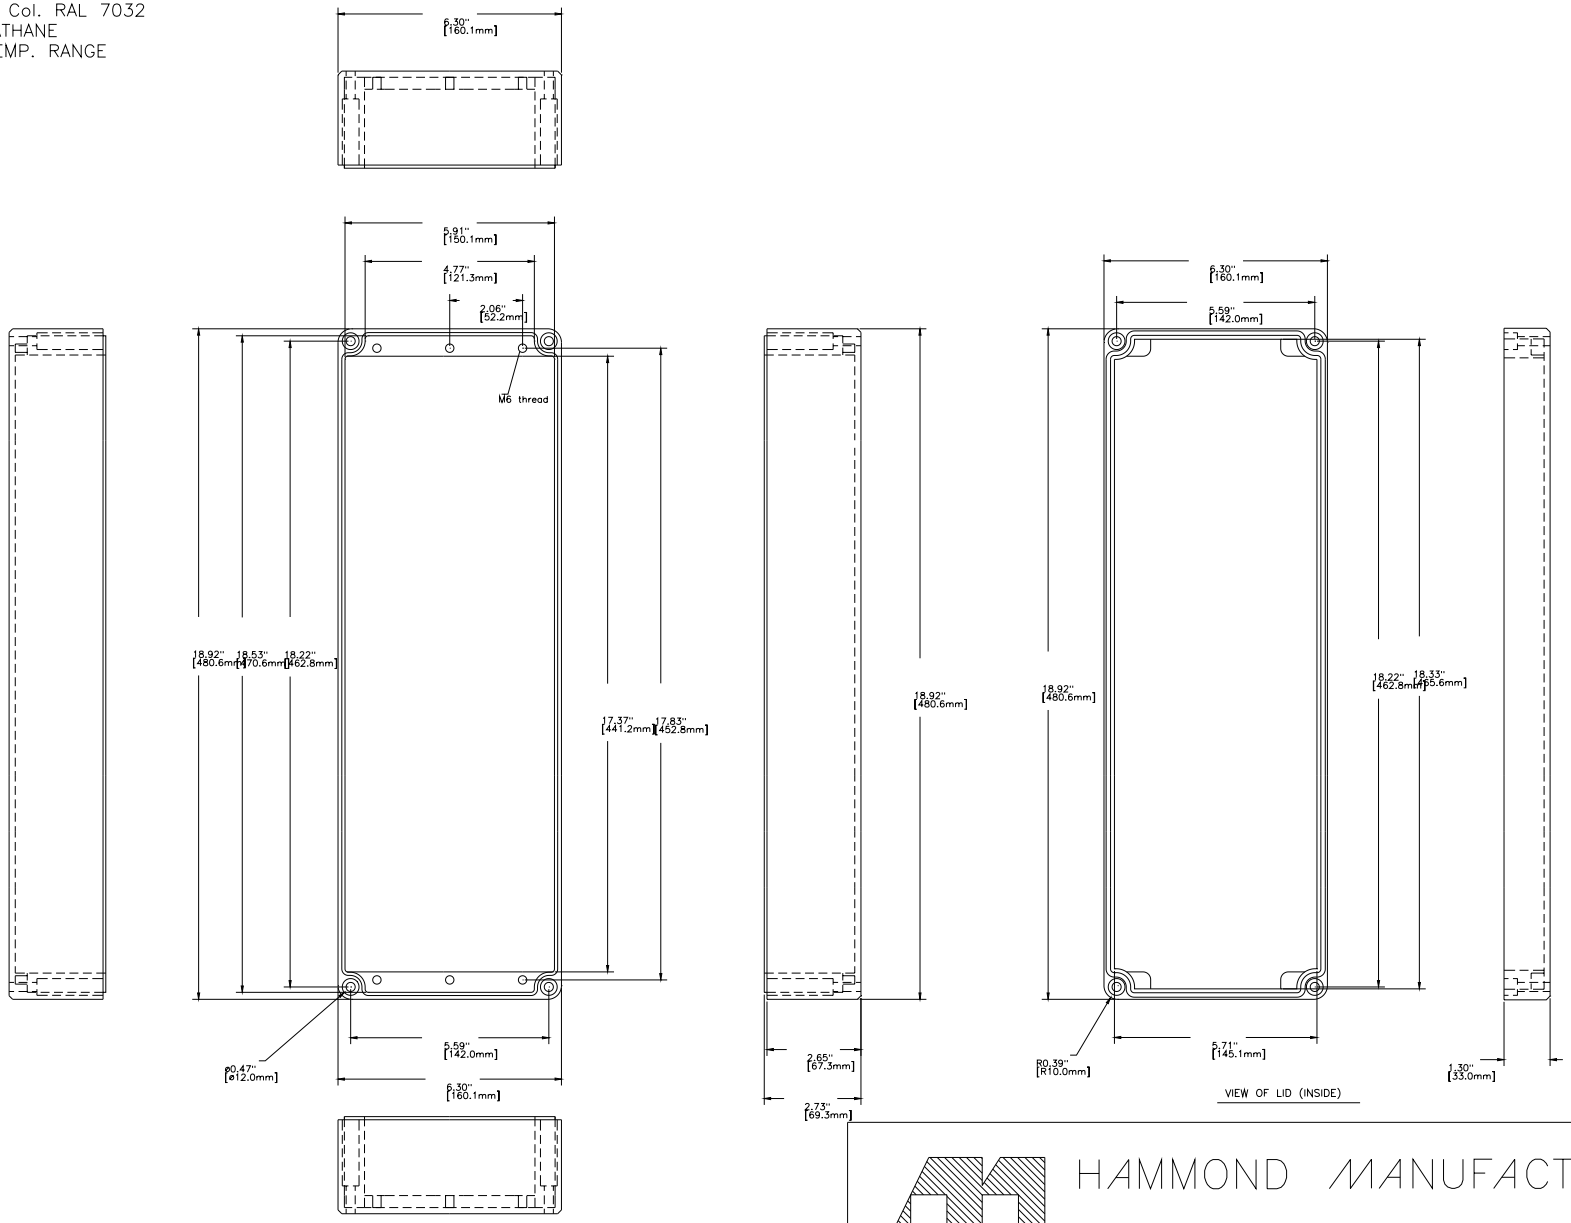


HAMMOND MANUFACTURING

R100–166–000