
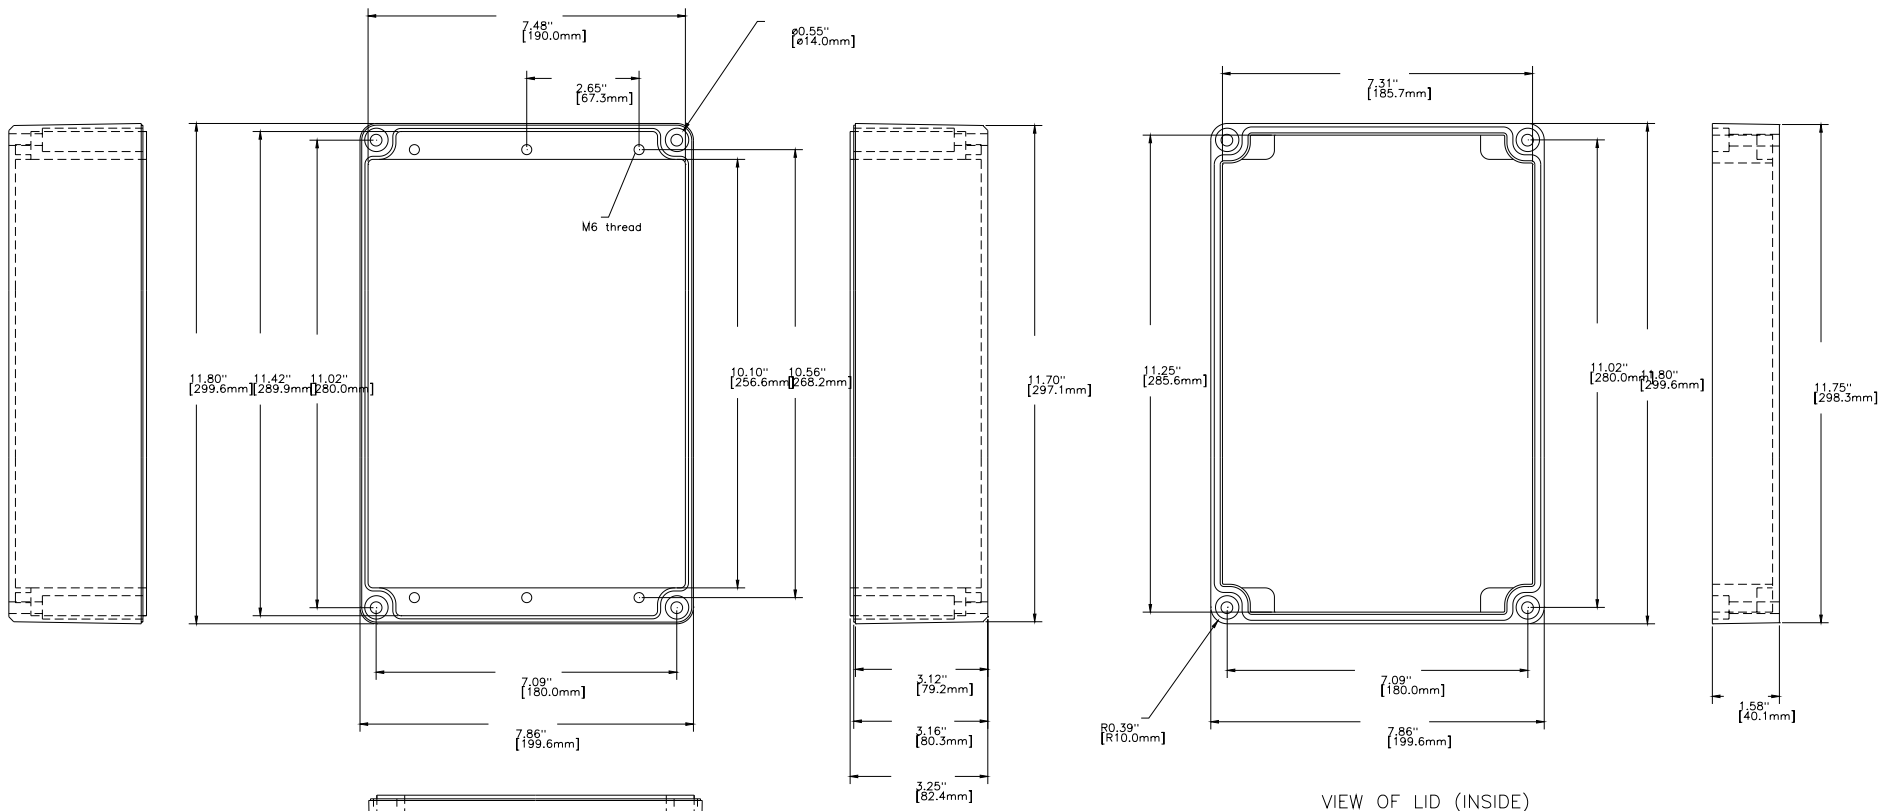



NOTES

MATERIAL - DIECAST ALUMINUM ALLOY  
 - FOUR M14 CAPTIVE SCREWS


POWDER COATED - Col. RAL 7032  
 GASKET - POLYURATHANE  
 -40°C TO +80°C TEMP. RANGE



VIEW OF LID (INSIDE)



VIEW OF BOX (LID REMOVED)



HAMMOND MANUFACTURING

R100-202-000