NOTES

MATERIAL – DIECAST ALUMINUM ALLOY
– FOUR M14 CAPTIVE SCREWS

POWDER COATED–Col. RAL 7032
GASKET – POLYURATHANE
–40°C TO +80°C TEMP. RANGE

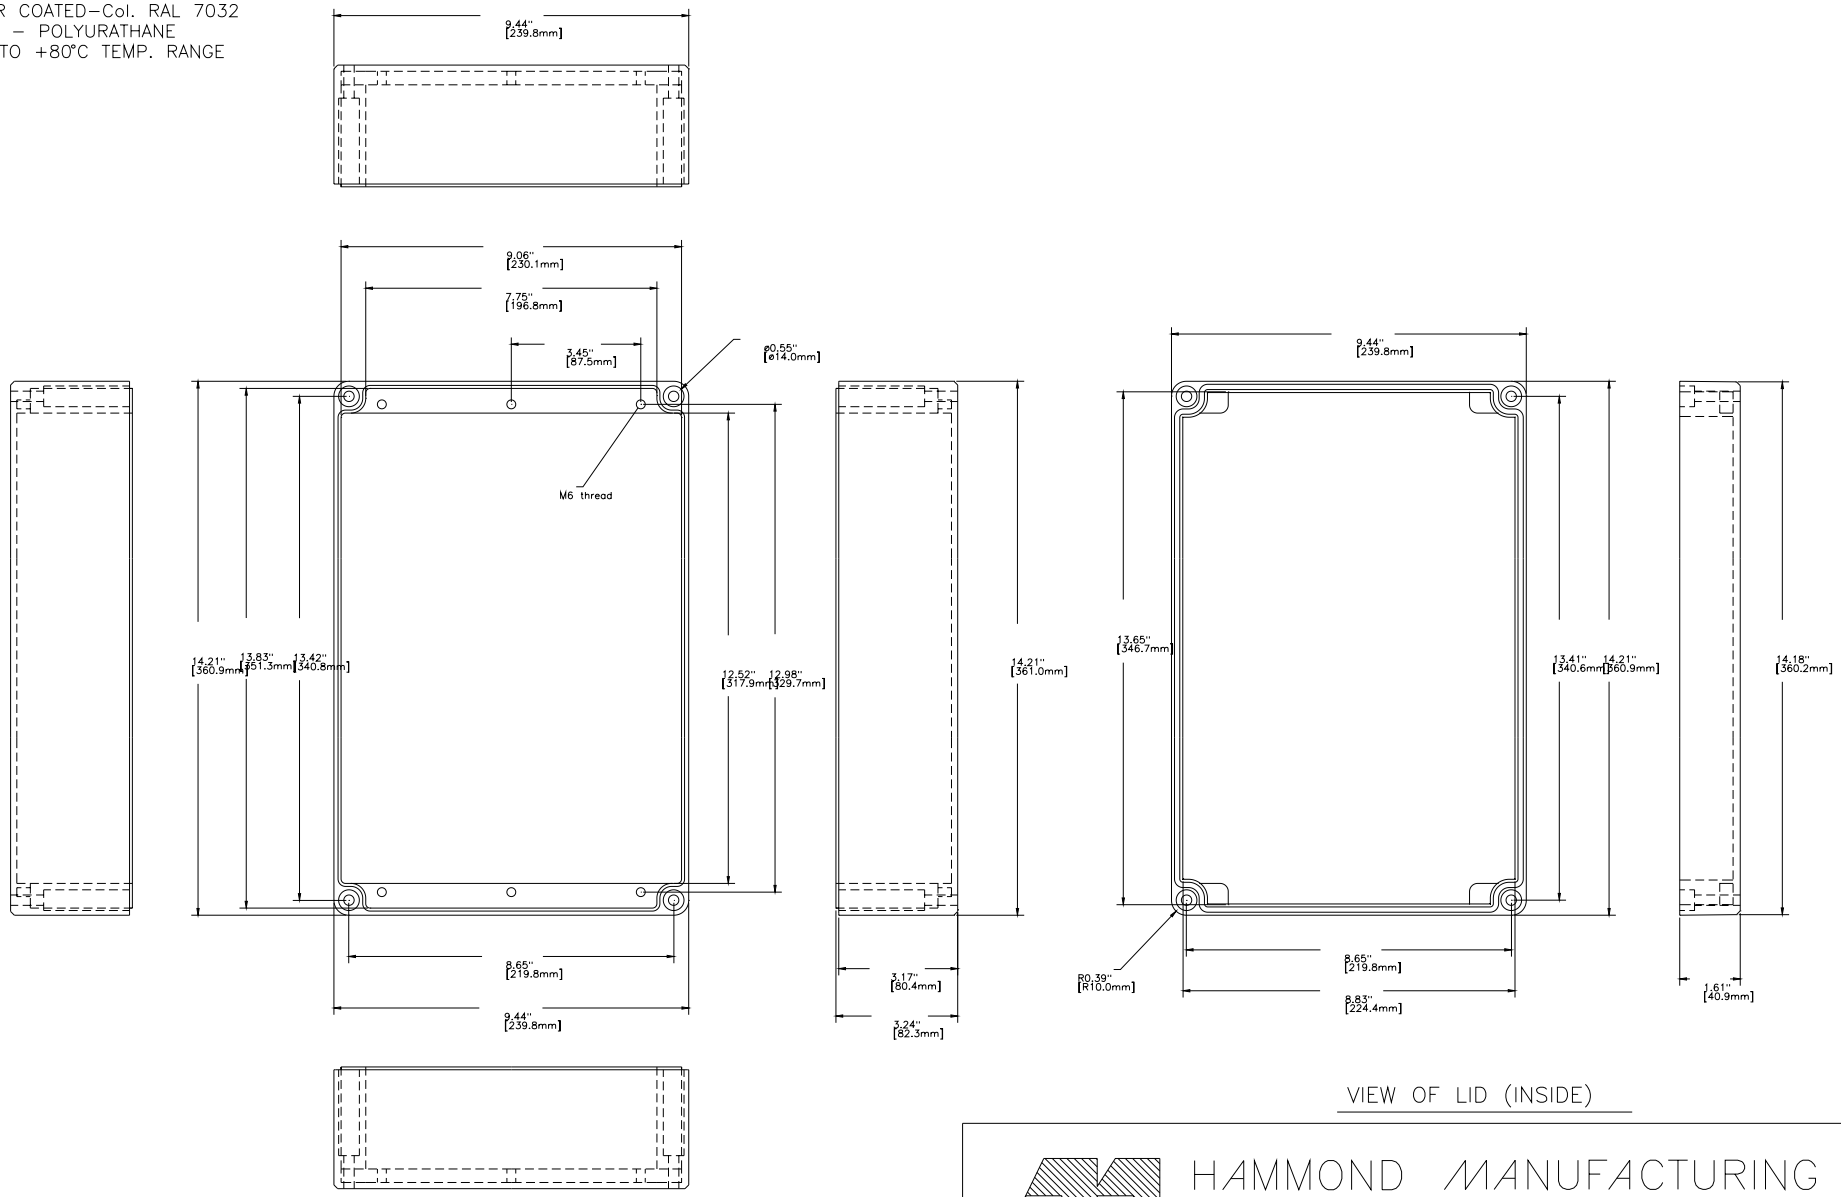

VIEW OF BOX (LID REMOVED)

VIEW OF LID (INSIDE)

HAMMOND MANUFACTURING

R100–242–000