NOTES

MATERIAL – DIECAST ALUMINUM ALLOY
– FOUR M14 CAPTIVE SCREWS

POWDER COATED –
Col. RAL 7032

GASKET – POLYURATHANE

–40°C TO +80°C
TEMP. RANGE

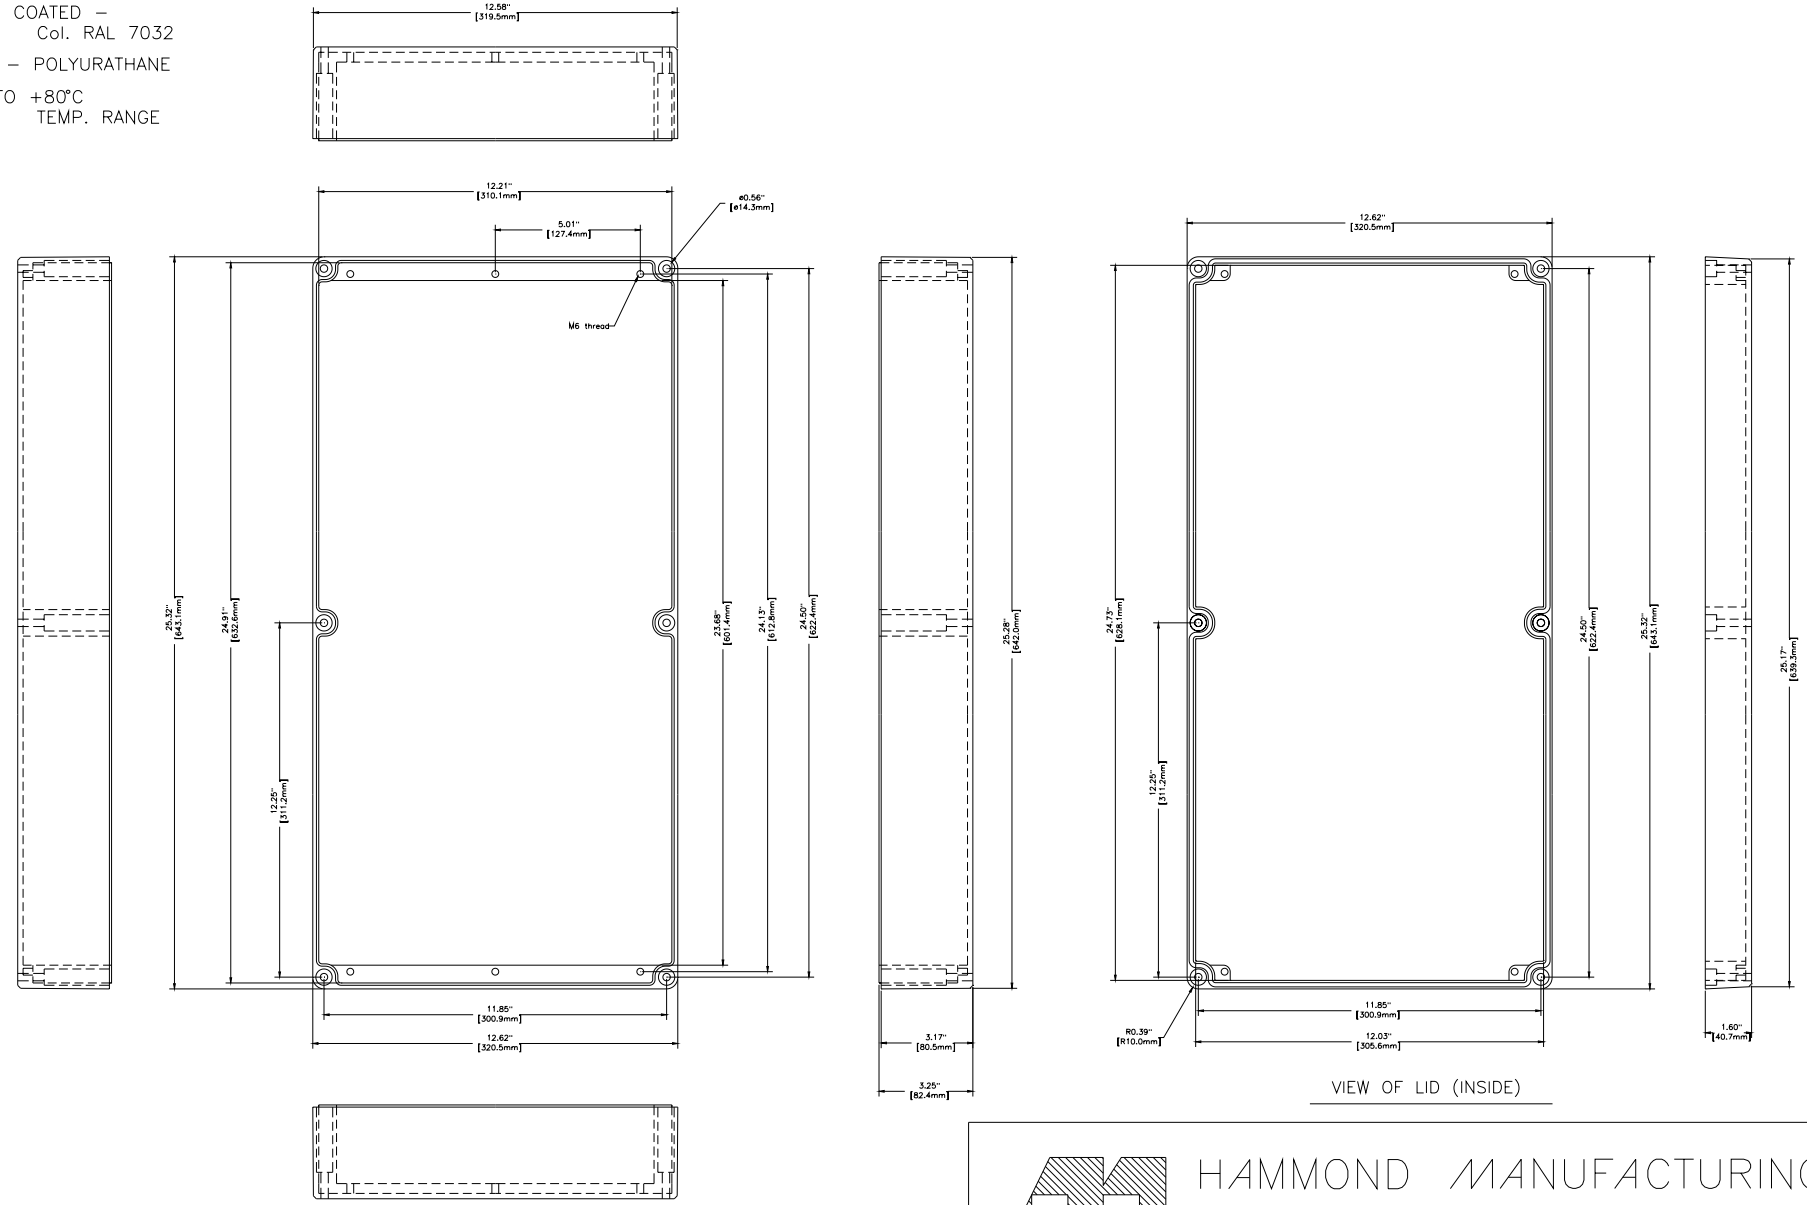

VIEW OF BOX (LID REMOVED)

VIEW OF LID (INSIDE)

HAMMOND MANUFACTURING

R100–324–000