
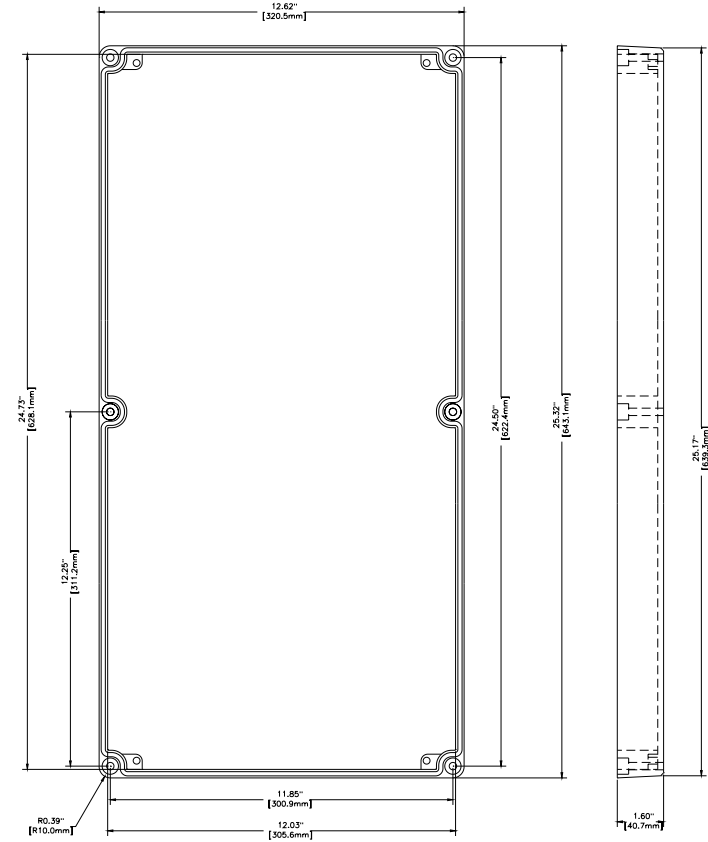
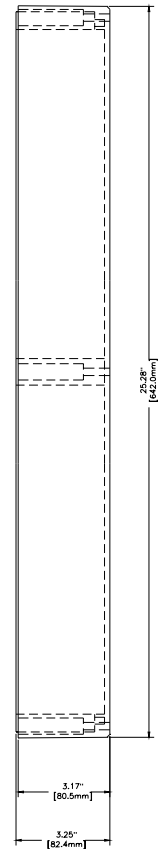
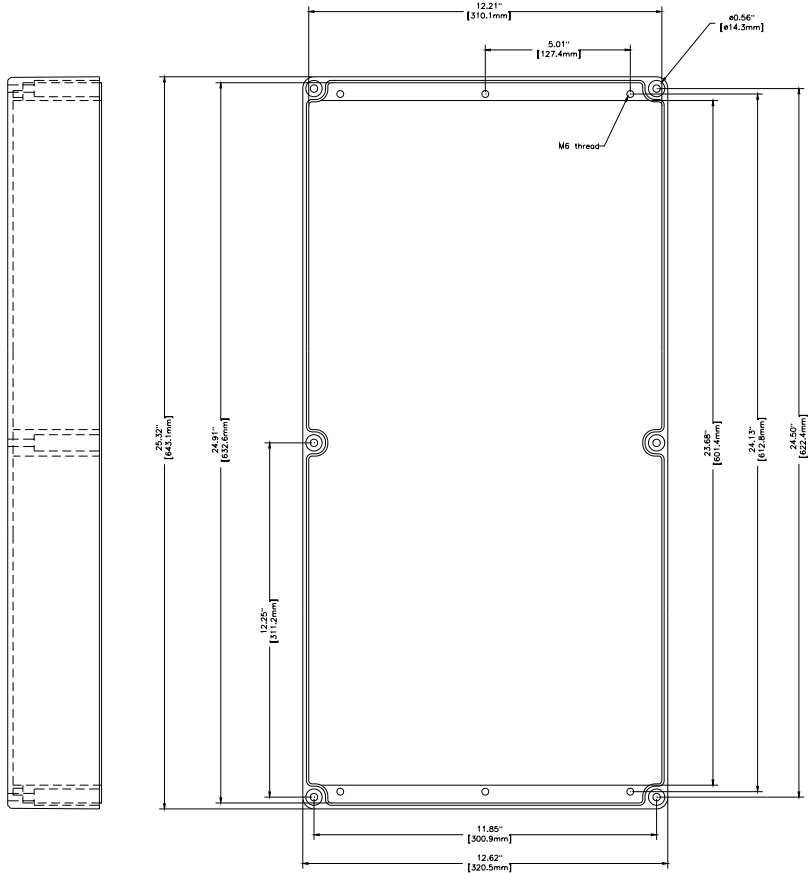


NOTES

MATERIAL - DIECAST ALUMINUM ALLOY
 - FOUR M14 CAPTIVE SCREWS


POWDER COATED -
 Col. RAL 7032
 GASKET - POLYURATHANE
 -40°C TO +80°C
 TEMP. RANGE

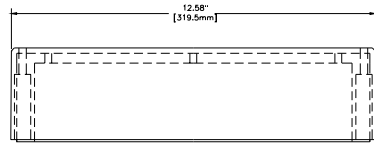

VIEW OF LID (INSIDE)



VIEW OF BOX (LID REMOVED)



HAMMOND MANUFACTURING

R100-324-000